



HITECHLED Optoelectronics Co., Ltd

Add.:21F, Honglong Plaza, Baoming 2nd Rd., Bao'an District, Shenzhen, China 518102

T: +86-755-3365 3232 F:+86-755-3365 3211

Products Specifications







New UFO LED Highbay Light 150W / 200W





Photoelectric Spec.	Items	HT-UFOHB-150W	HT-UFOHB-200W
	Philips Chips SMD3030	196 pcs	238 pcs
	Luminous Flux	16500-18000lm	20000-22000lm
	CCT	2700-3200K / 4000-4500K / 6000-6500K	2700-3200K / 4000-4500K / 6000-6500K
	CRI	>80	>80
	Lens	60° / 90°	60° / 90°
	Lifespan	more than 50.000 Hrs	more than 50.000 Hrs
	Input Voltage	90-305V AC 50/60Hz	90-305V AC 50/60Hz
	Power Factor	>0.9	>0.9
	Activation time	Lower 0,05 S (@ 220V AC)	Lower 0,05 S (@ 220V AC)
	Total Power	150W	200W
Structure Spec.	Material	Aluminum + PC	Aluminum + PC
	Waterproof	indoor and outdoor use / IP65	indoor and outdoor use / IP65
	Dimensions	ø383*H217mm	ø383*H217mm
	Net Weight	4.00 kg	5.00 kg
Integrated Spec.	Operating temperature	-20 ~ 60 Celsius	-20 ~ 60 Celsius
	Humidity Storage	0% ~ 85% RH	0% ~ 85% RH
	security Requirement	CE	CE
	Environmental Directives	RoHS	RoHS
	Application	indoor stadium / industrial workshops / supermarkets / shopping mall / warehouse / show room / GAS station etc.	

Dimension Diagram

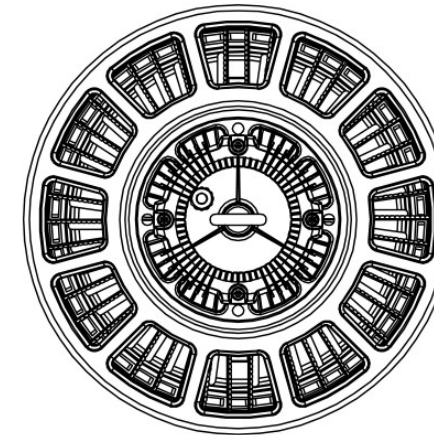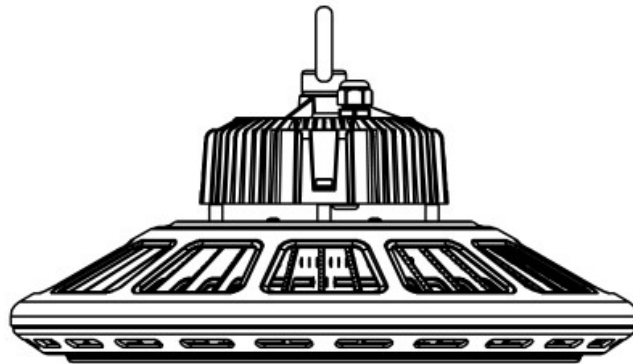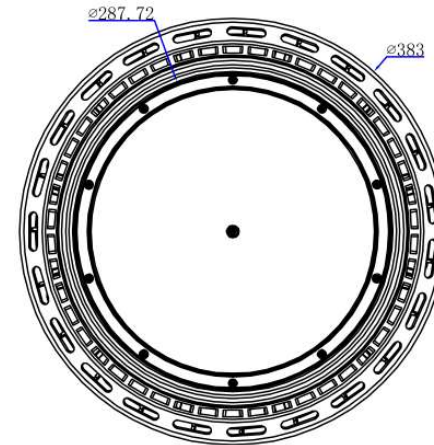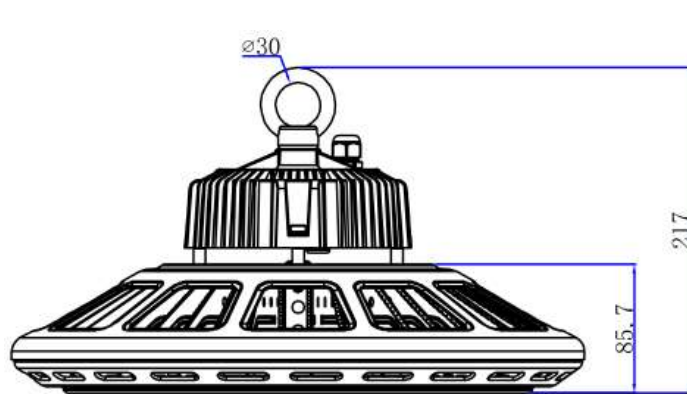


Optical Specification




HT-UFOHB-150W

Radiation

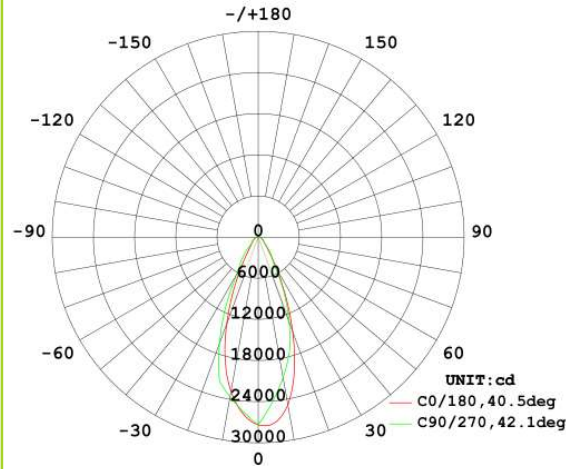


Lux Diagram

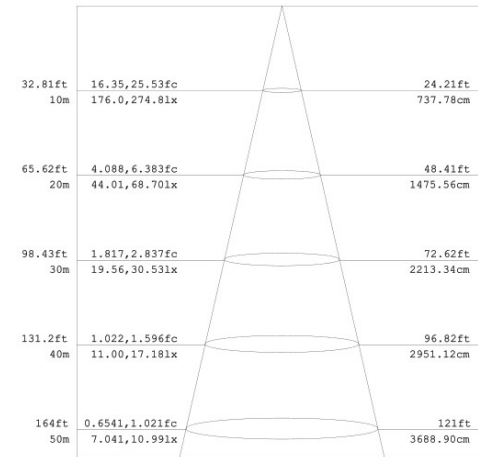


HT-UFOHB-200W


Radiation

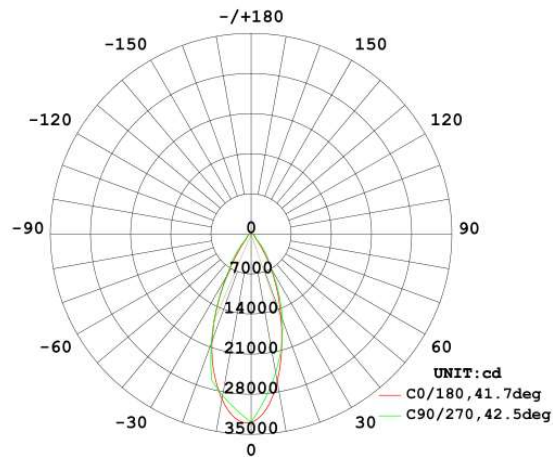


Lux Diagram

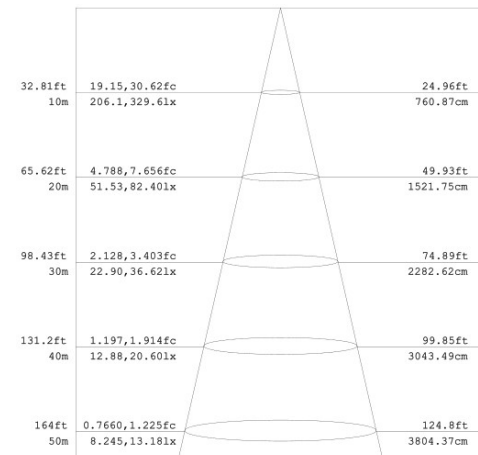


Products details

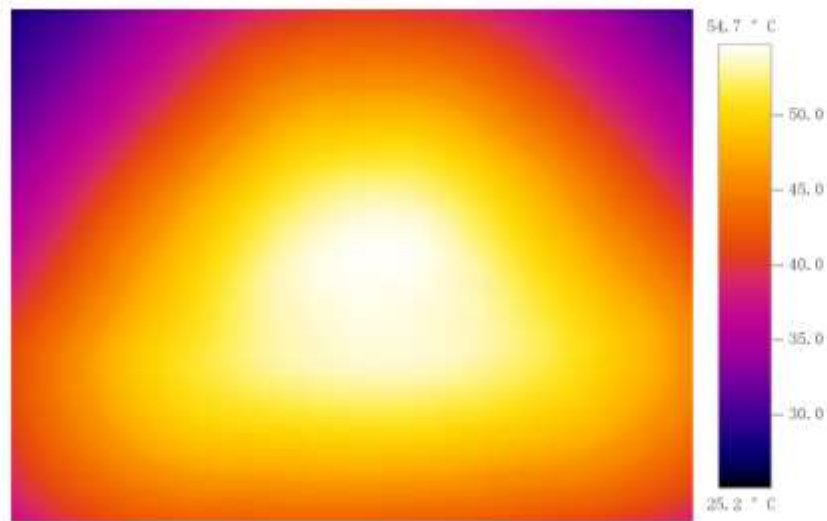

Products details

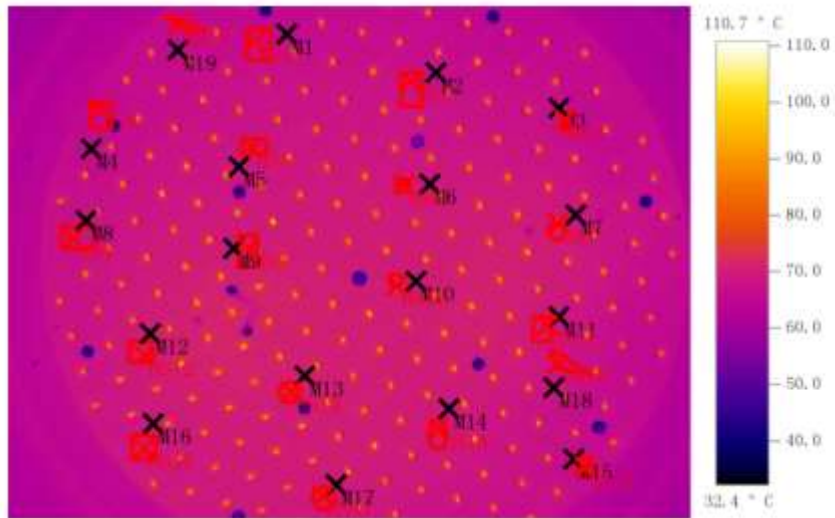

Products details

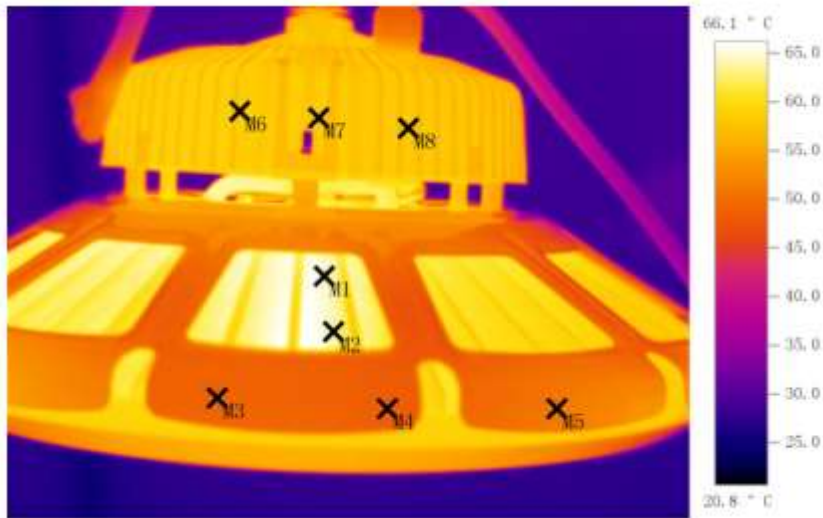





Packing Information

Item	inner box			Carton		
	Measurement	Gross weight	Pcs/box	Measurement	Gross weight	Pcs/carton
HT-UFOHB-150W	/	/	/	455*455*220 mm	6.00 kg	1
HT-UFOHB-200W	/	/	/	455*455*220 mm	7.00 kg	1



Packing Spec.

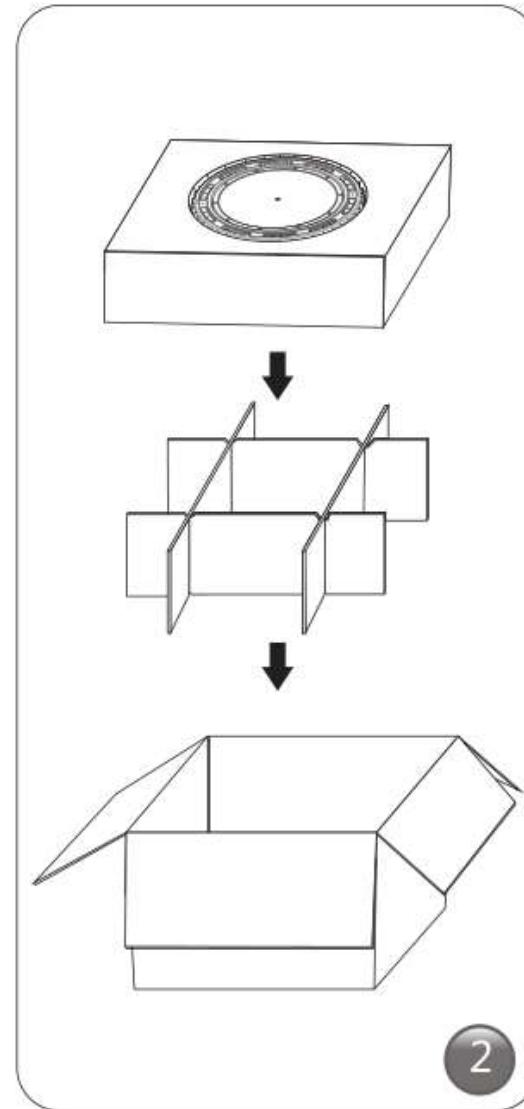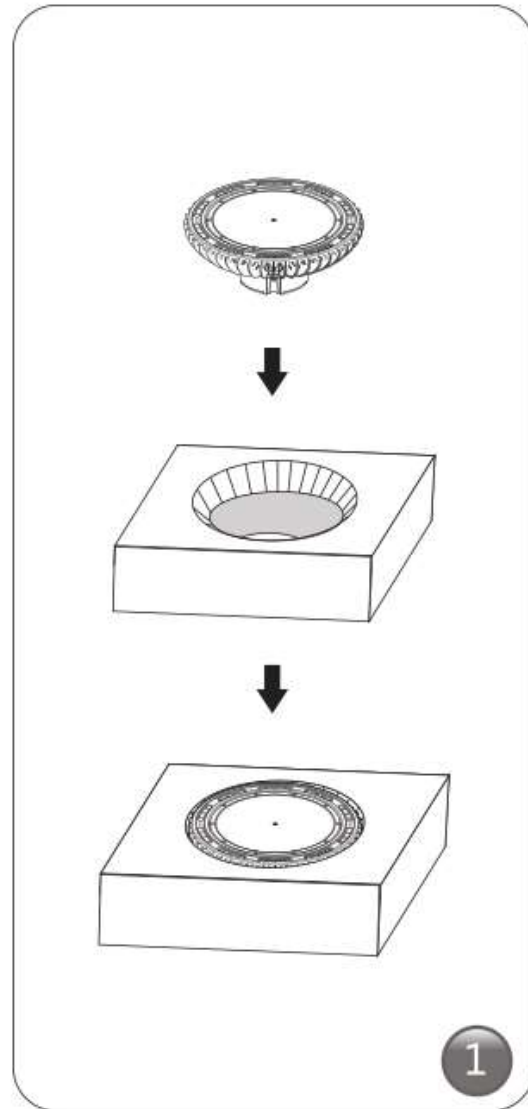



Application Project

